


Quick-Start Guide

Your product may differ slightly from the item shown.



1

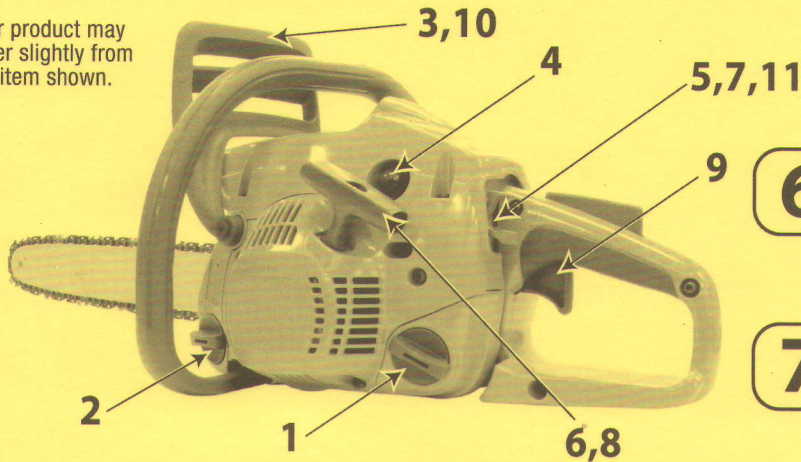


Mix 2.6 oz. of 2-Cycle Oil with 1 gallon of gasoline for a 50:1 mixture. Shake well. Pour into fuel tank.

2



Add bar oil to oil tank.

3

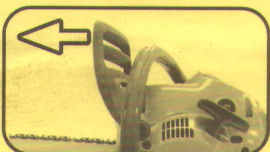


To prevent chain from moving during start-up, engage chain brake by pressing forward on the hand guard.

4




Slowly press primer bulb 6 times.

5

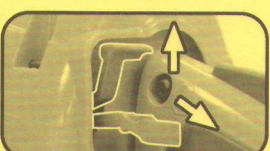


Turn switch to ON position and pull choke out fully (ON).

6

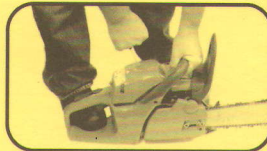

Place foot in rear handle as shown. Pull starter rope sharply until engine attempts to start (approximately 5 pulls). Then go to step 7.

7

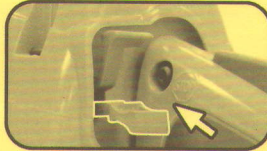


Push choke to half choke after engine attempts to start (1/2).

8



Pull starter rope as shown until engine starts.

9

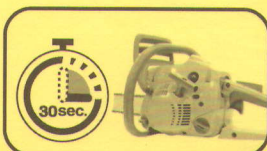


Allow engine to warm for 30 seconds. Squeeze throttle trigger to set normal idle.

10



Disengage chain brake by pulling the hand guard back. The saw is now ready for use.

11

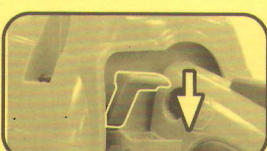

Turn switch to STOP position when finished using saw.

12



See Owner's manual for detailed starting instructions.

ATTENTION: NEVER

let your saw chain come in contact with soil/dirt during operation.

Letting your saw chain come in contact with soil/dirt while the chain is turning will completely dull your chain in a matter of seconds. This will result in poor cutting and will require purchasing a new chain.



Please Do Not Return This Product To The Store
Contact Customer Service Toll Free 1-800-438-7297

